




SN# 22052708 Lamp Specific Acceptance Test


Model: UV-3400, Nomad-GO	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	368 ✓	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	11 ✓	≤ 15	nm
Full Width at 10% Maximum	Pass	22 ✓	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375 ✓	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	3669 ✓	≥ 2000	$\mu\text{W}/\text{cm}^2$

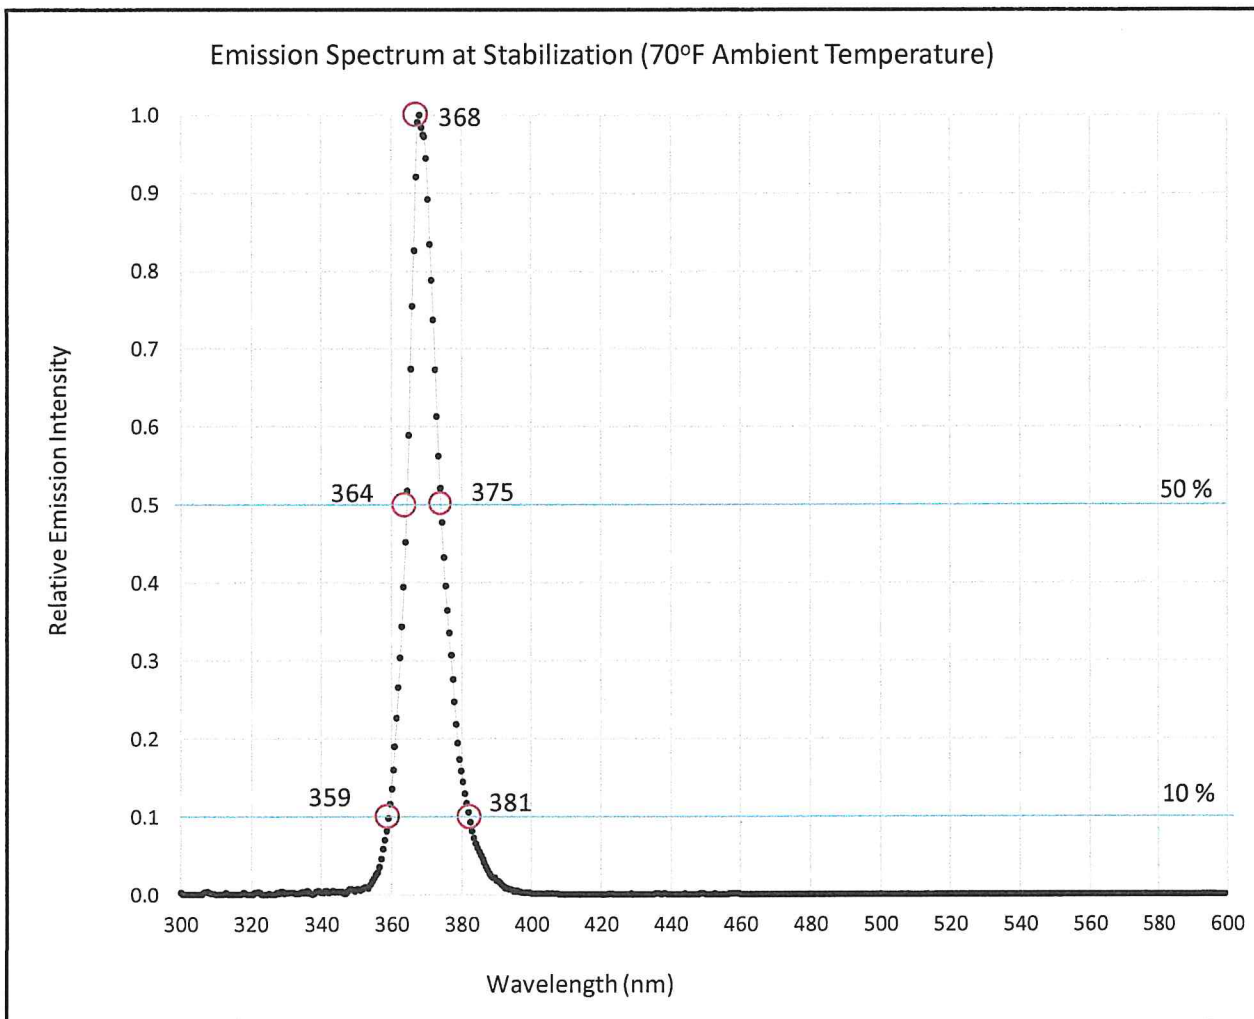

Inspector: MHP
Date of Certification: 01-15-2026

This lamp has been tested to conform to all requirements of:
ASTM E3022 ✓ AITM6-1001 ✓ ISO 3059 ✓ RRES 90061 ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 18120729, Certificate Number 18120729-UV-CR2-0925



C4 Nomad Series, Certificate of Conformance



SN# 22052708_nomadgo_recert3	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	367	368	369	365 ± 5	nm
Full Width Half Maximum (FWHM)	11	11	13	≤ 15	nm
Full Width at 10% Maximum	22	22	25	≤ 30	nm
Longest Wavelength at Half Maximum	374	375	376	≤ 377	nm
Visible Emission at 15 in	9	8	8	≤ 20	Lux
Visible Emission at 36 in	3	3	3	≤ 5	Lux
Irradiated Area at 15 in ($>1000 \mu\text{W}/\text{cm}^2$)	11	10	9	≥ 5	Inch Diameter
Max Excitation Irradiance (347-382 nm)	3,852	3,669	2,400	≥ 2000	$\mu\text{W}/\text{cm}^2$
Irradiance at Peak Output Wavelength	335	319	185	-	$\mu\text{W}/\text{cm}^2$
Min Working Distance** ($< 5000 \mu\text{W}/\text{cm}^2$)	14	12	11	-	Inches
Max Working Distance** ($> 1200 \mu\text{W}/\text{cm}^2$)	27	23	21	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	°F
Current Ripple	9	9	9	≤ 35	mA peak-peak
Typical Battery Discharge Time (36Wh Batt)	-	150	-	-	Minutes

* Tested in a 110°F Environment, the maximum ambient temperature where light still meets requirements

** C4 Nomad series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

