


SN# 001401 Lamp Specific Acceptance Test



Model: UV-2100DH, Magnum Liquid Stylus	Result	Steady State	Acceptable	Units
Peak Output Wavelength	Pass	370 ✓	365 ± 5	nm
Full Width Half Maximum (FWHM)	Pass	11 ✓	≤ 15	nm
Full Width at 10% Maximum	Pass	21 ✓	≤ 30	nm
Longest Wavelength at Half Maximum	Pass	375 ✓	≤ 377	nm
Max Excitation Irradiance (347-382 nm)	Pass	1690 ✓	≥ 1200	$\mu\text{W}/\text{cm}^2$

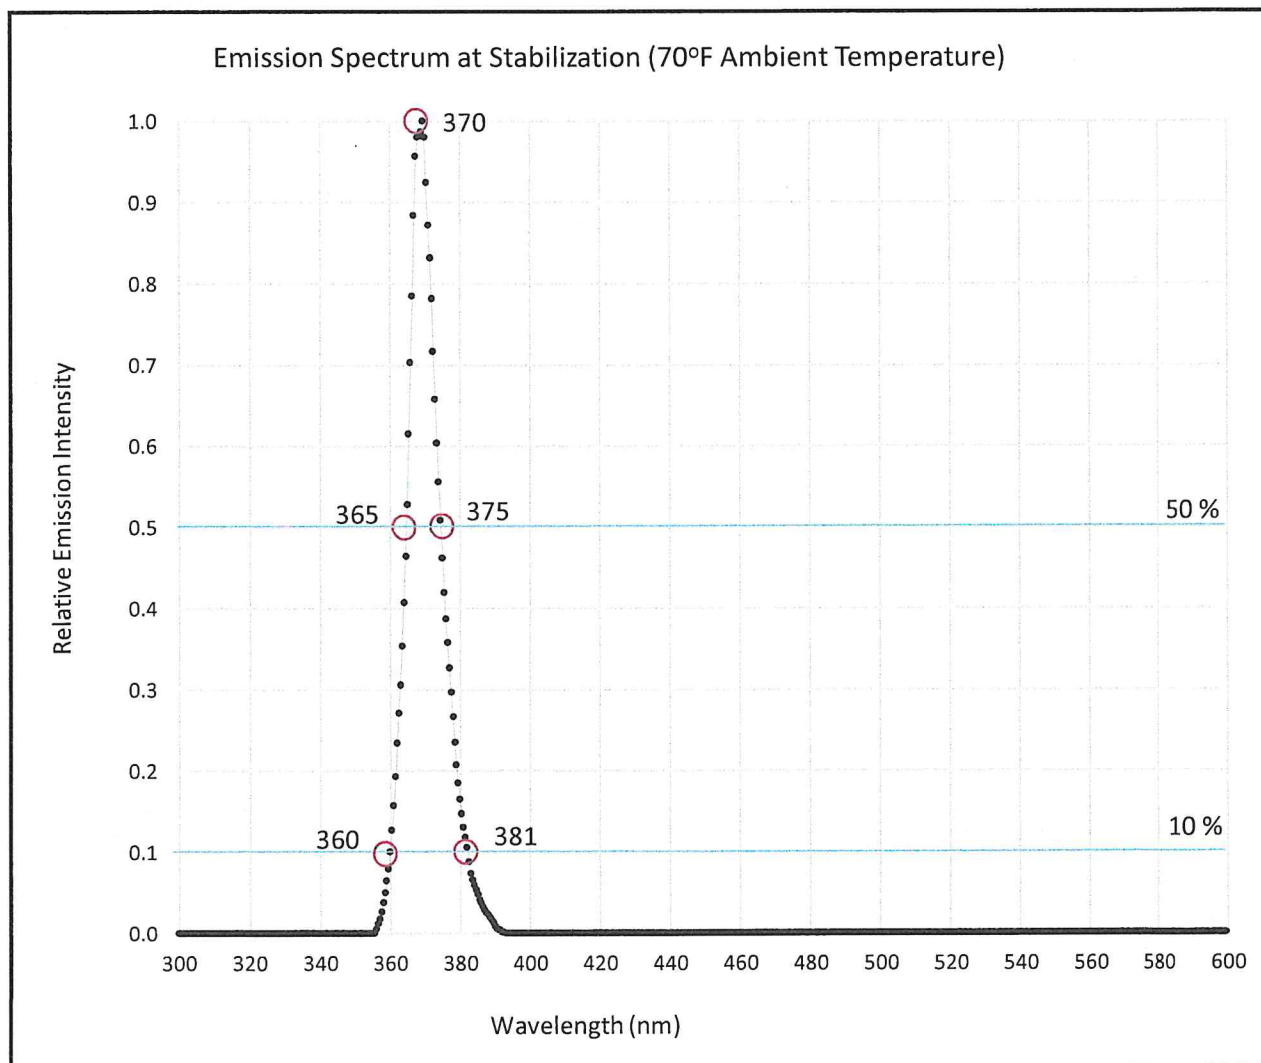

Inspector:

Mik


Date of Certification:

5.15.2026

This lamp has been tested to conform to all requirements of:

ASTM E3022 ✓ AITM6-1001 ✓ ISO 3059 ✓ RRES 90061 ✓

Emission Spectrum Measured at Stabilization Temperature with Blue-wave UV-25 S/N 18120729, Certificate Number 18120729-UV-CR2-0925



C4 Magnum Series, Certificate of Conformance



SN# 001401_liquid_stylus	Switch On	Steady State	Elevated Temp*	Acceptable	Units
Peak Output Wavelength	369	370	370	365 ± 5	nm
Full Width Half Maximum (FWHM)	11	11	11	≤ 15	nm
Full Width at 10% Maximum	21	21	21	≤ 30	nm
Longest Wavelength at Half Maximum	374	375	377	≤ 377	nm
Visible Emission at 15 in	0.4	0.4	0.4	≤ 2	fc
Visible Emission at 36 in	0.1	0.1	0.1	$\leq .5$	fc
Irradiated Area at 15 in ($>1000 \mu\text{W}/\text{cm}^2$)	4	4	4	≥ 3	Inch Diameter
Max Excitation Irradiance (347-382 nm)	1,774	1,690	1,200	$\geq 1,200$	$\mu\text{W}/\text{cm}^2$
Irradiance at Peak Output Wavelength	157	150	130	-	$\mu\text{W}/\text{cm}^2$
Min Working Distance** ($< 2 \text{ fc}$)	4	4	4	-	Inches
Max Working Distance** ($> 1200 \mu\text{W}/\text{cm}^2$)	16	16	15	-	Inches
Body Stabilization Temp (70°F Ambient)	-	116	-	≤ 120	$^\circ\text{F}$
Current Ripple	9	9	9	≤ 35	mA peak-peak

* Tested in a 110°F Environment, the maximum ambient temperature where light still meets all requirements

** C4 Magnum series lights use a single LED emitter, thus beam uniformity does not change with working distance (RRES 90061)

